




140X140X25mm




General Specifications

Airflow	62.1~115.3 CFM
Static Pressure	1.3~4.0 mm-H2O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1041 #24 AWG

Dimensions:mm

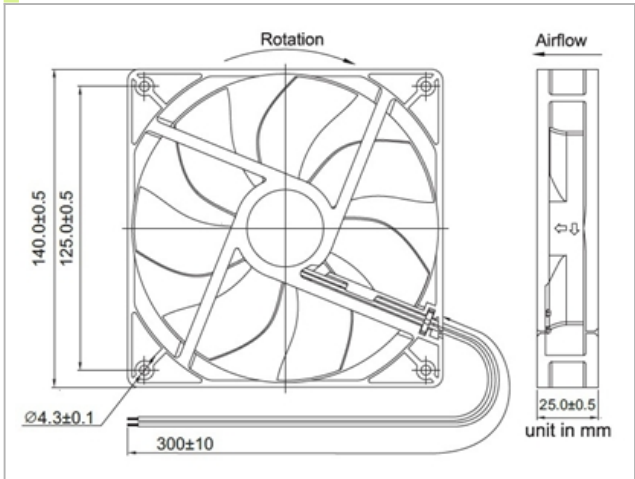

Performance

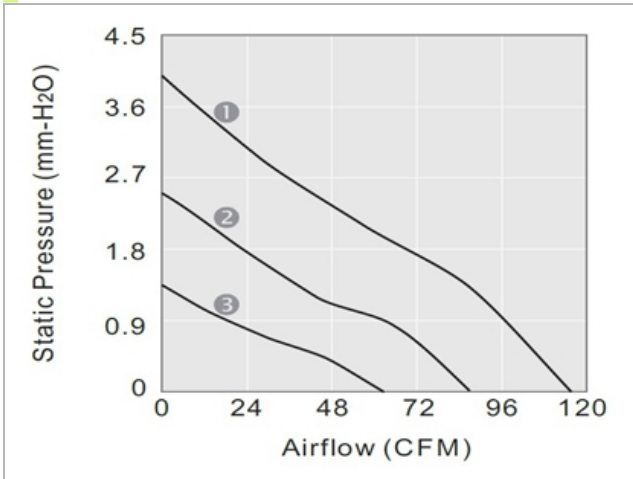

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H2O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD121425LL-N	Sintetico	12	7~13.2	1050	62.1	1.3	70	0.84	50000	3	21.7	182
GD121425ML-N	Sintetico	12	7~13.2	1450	87.1	2.5	170	2.04	50000	2	31.6	182
GD121425HL-N	Sintetico	12	7~13.2	1850	115.3	4.0	370	4.44	50000	1	40.6	182
GD121425LB-N	2BALL	12	7~13.2	1050	62.1	1.3	70	0.84	80000	3	21.7	182
GD121425MB-N	2BALL	12	7~13.2	1450	87.1	2.5	170	2.04	80000	2	31.6	182
GD121425HB-N	2BALL	12	7~13.2	1850	115.3	4.0	370	4.44	75000	1	40.6	182