




97X97X33mm




General Specifications

Airflow	37.8~58.4 CFM
Static Pressure	34.7~139.6 mmH ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007#24AWG

Dimensions:mm

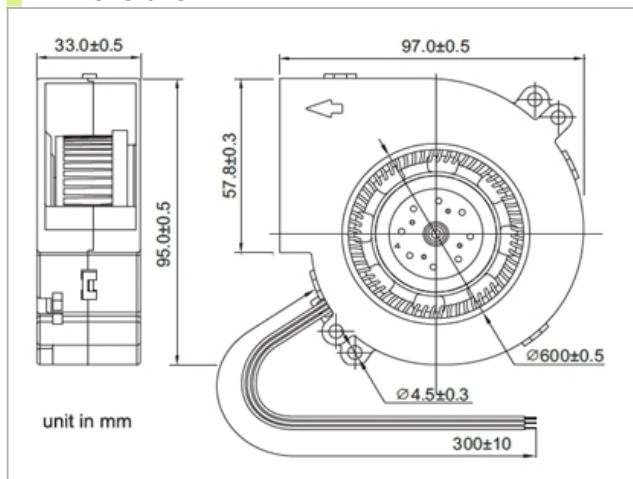

Performance

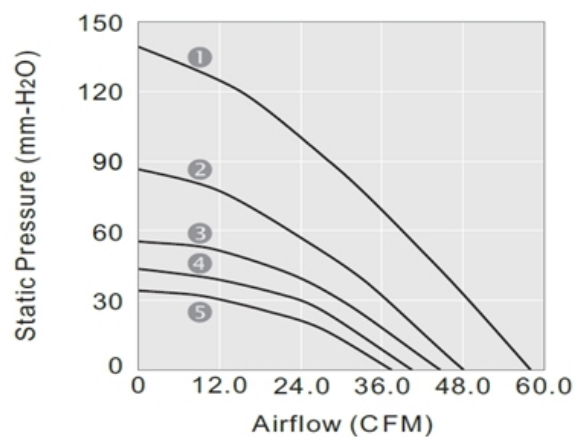

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GB129733LB-N	2BALL	12	7~13.2	4500	37.8	34.7	900	10.80	80000	5	54.8	200
GB129733MB-N	2BALL	12	7~13.2	4850	40.7	44.1	1200	14.40	80000	4	56.7	200
GB129733HB-N	2BALL	12	7~13.2	5250	44.8	55.8	1600	19.20	75000	3	58.4	200
GB129733EB-N	2BALL	12	7~13.2	5750	48.2	86.6	2700	32.40	65000	2	60.6	200
GB129733UB-N	2BALL	12	7~13.2	6850	58.4	139.6	4200	50.40	65000	1	64.8	200
GB249733LB-N	2BALL	24	12~26.4	4500	37.8	34.7	500	12.00	80000	5	54.8	200
GB249733MB-N	2BALL	24	12~26.4	4850	40.7	44.1	600	14.40	80000	4	56.7	200
GB249733HB-N	2BALL	24	12~26.4	5250	44.8	55.8	800	19.20	75000	3	58.4	200
GB249733EB-N	2BALL	24	12~26.4	5750	48.2	86.6	1200	28.80	65000	2	60.6	200
GB249733UB-N	2BALL	24	12~26.4	6850	58.4	139.6	2000	48.00	65000	1	64.8	200