




15 TYPE



General Specifications

Airflow 2200~4500 m3/H

Dimensions:mm

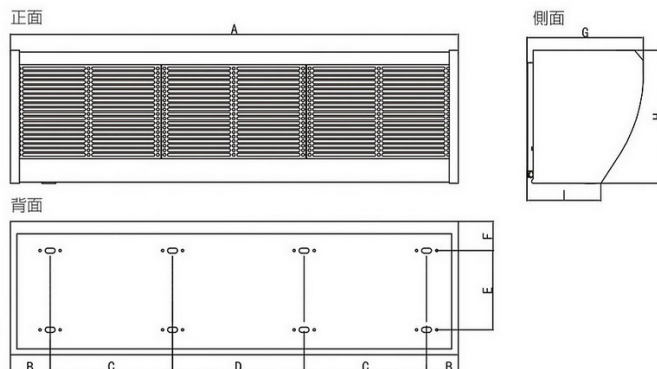

機型	A	B	C	D	E	F	G	H	I
FL-1509	895	53	293	200	157	57	230	265	148
FL-1512	1180	53	434						
FL-1515	1450	53	572						

備註：以上機型最後英文代號省略係概括15系列之所有機型

Specifications

Model NO.	Rated Voltage VAC	Frequency HZ	Airflow M3/H	Static Pressure M/SEC	Current A	Power W
FL-1509EF Two-Speed	220	60	2200~2850	10.5~13.5	1.05/1.25	270
FL-1512EF Two-Speed	220	60	2900~3800	10.5~13.5	1.45/1.73	365
FL-1515EF Two-Speed	220	60	3400~4500	10.5~13.5	2.05/2.16	475
FL-1509EC Two-Speed`	110	60	2200~2850	10.5~13.5	1.35/1.64	180
FL-1512EC Two-Speed	110	60	2900~3800	10.5~13.5	1.96/2.78	305
FL-1515EC Two-Speed	110	60	3400~4500	10.5~13.5	3.30/3.55	385
FL-1509A	110/220	60	2300	12.5	2.26/1.15	250
FL-1512A	110/220	60	3150	12.5	2.60/1.29	285
FL-1509B	110/220	60	3200	16.5	4.65/2.35	515
FL-1512B	110/220	60	4500	16.5	5.15/2.60	570
FL-1509K/L 3Ø	220/380	60	2300	12.5	0.68/0.43	160
FL-1512K/L 3Ø	220/380	60	3150	12.5	0.71/0.44	165
FL-1509K 3Ø	220/380	60	3100	16	0.95/0.55	195
FL-1512K 3Ø	220/380	60	4400	16	1.15/0.60	250