




92X92X25mm




General Specifications

Airflow	21~36 CFM
Housing	Die Cast Aluminum & Zinc
Impeller	Plastic With Fiber Glass Filled UI 94V-0
Motor Type	Shaded Pole, Impedance Protected
Connecting	Terminal & Wire Leads

Dimensions:mm

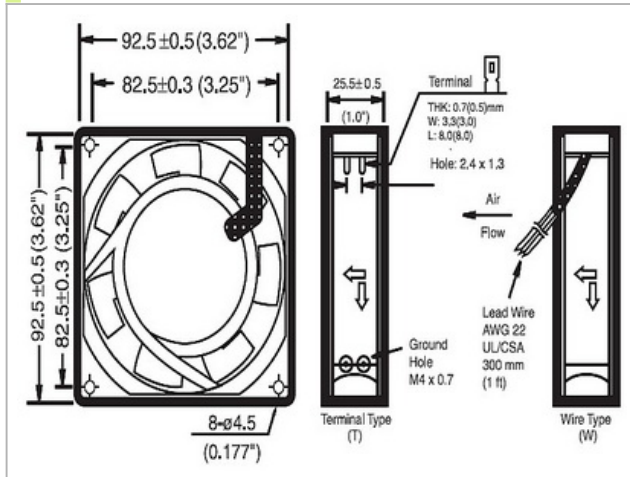

Performance

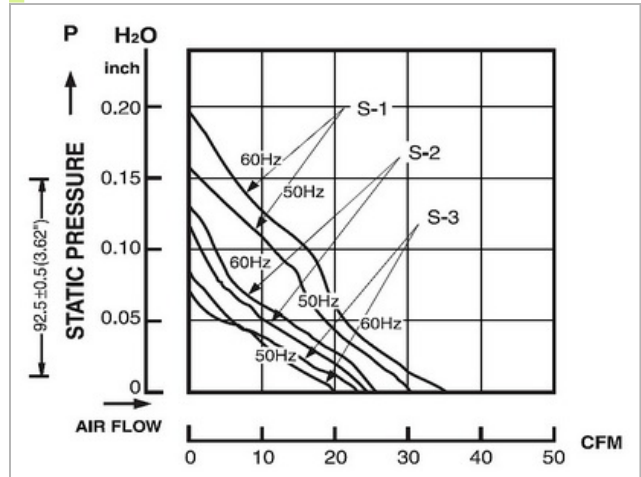

Specifications

Model NO.	Bearing	Rated Voltage	Frequency	Speed	Airflow	Static Pressure	Current	Power	Noise
		VAC	HZ	RPM	CFM	Inch-H2O	A	W	dBA
GA1092HBL	2BALL	110/120	50/60	2400/2800	30/36	0.16/0.20	0.21/0.20	19/17	35/37
GA1092HBT	2BALL	110/120	50/60	2400/2800	30/36	0.16/0.20	0.21/0.20	19/17	35/37
GA1092HSL	SLEEVE	110/120	50/60	2400/2800	30/36	0.16/0.20	0.21/0.20	19/17	35/37
GA1092HST	SLEEVE	110/120	50/60	2400/2800	30/36	0.16/0.20	0.21/0.20	19/17	35/37
GA2092HBL	2BALL	220/240	50/60	2400/2800	30/36	0.16/0.20	0.10/0.09	19/17	35/37
GA2092HBT	2BALL	220/240	50/60	2400/2800	30/36	0.16/0.20	0.10/0.09	19/17	35/37
GA2092HSL	SLEEVE	220/240	50/60	2400/2800	30/36	0.16/0.20	0.10/0.09	19/17	35/37
GA2092HST	SLEEVE	220/240	50/60	2400/2800	30/36	0.16/0.20	0.10/0.09	19/17	35/37
GA1092MBL	2BALL	110/120	50/60	2100/2400	25/28	0.13/0.14	0.07/0.06	12/10	28/30
GA2092MBL	2BALL	220/240	50/60	2100/2400	25/28	0.13/0.14	0.06/0.05	12/10	28/30
GA1092LBL	2BALL	110/120	50/60	1700/1900	21/22	0.10/0.09	0.06/0.05	8/6	22/24
GA2092LBL	2BALL	220/240	50/60	1700/1900	21/22	0.10/0.09	0.05/0.04	8/6	22/24