




25X25X06mm




General Specifications

Airflow	1.4~2.6 CFM
Static Pressure	1.52~5.08 mmAq
Frame	Plastic UL94V-0
Lead Wire	UL1571 AWG28
Impeller	Plastic UL94V-0

Dimensions:mm

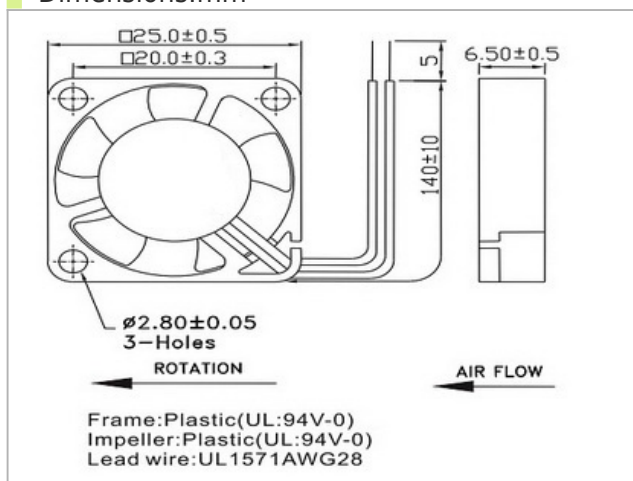

Performance

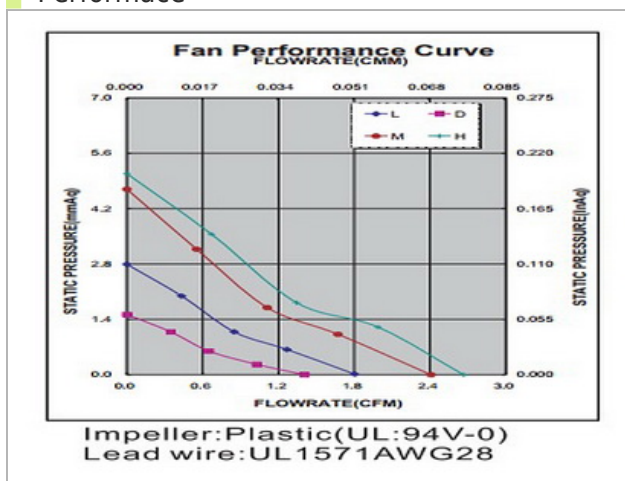

Specifications

Model NO.	Bearing	Rated Voltage VDC	Speed RPM	Airflow CFM	Static Pressure mmAq	Current A	Power W	Noise dBA	Weight g
GD052506HX-A	Hypro	05	14000	2.6	5.08	0.15	0.75	35	5
GD052506MX-A	Hypro	05	12000	2.4	4.69	0.12	0.6	29	5
GD052506LX-A	Hypro	05	9000	1.8	2.79	0.07	0.35	21.5	5
GD052506DX-A	Hypro	05	7000	1.4	1.52	0.05	0.25	14	5
GD122506MX-A	Hypro	12	12000	2.4	4.69	0.06	0.72	29	5
GD122506LX-A	Hypro	12	9000	1.8	2.79	0.05	0.6	21.5	5