


92X92X38mm




General Specifications

Airflow	27~45 CFM
Housing	Die Cast Aluminum Painted Black Or Natural Color
Impeller	Plastic With Fiber Glass Filled UI 94V-0
Motor Type	Shaded Pole, Impedance Protected
Connecting	Wire Leads

Dimensions:mm

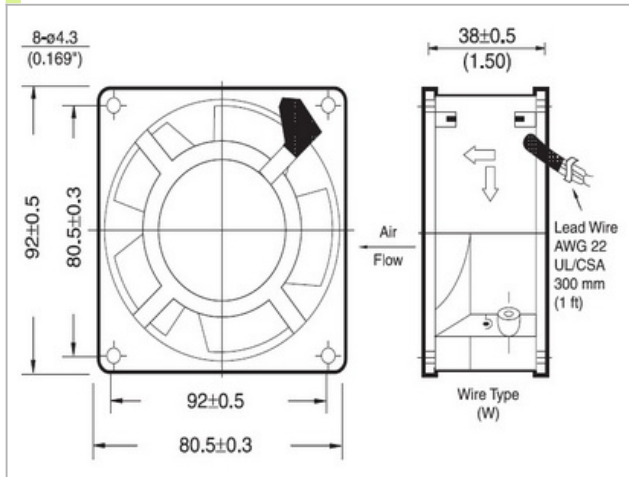

Performace

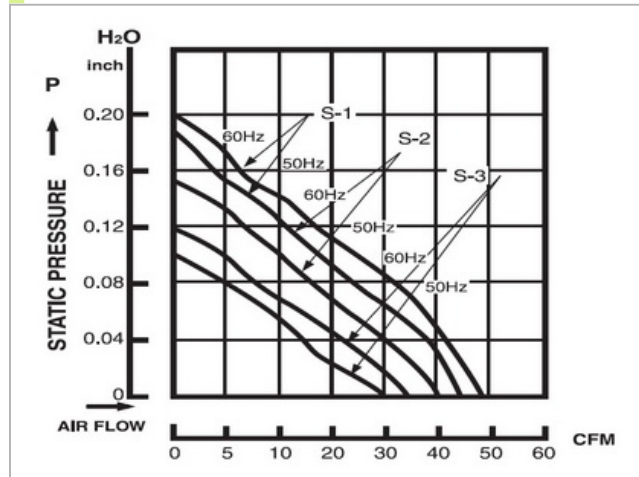

Specifications

Model NO.	Bearing	Rated Voltage	Frequency	Speed	Airflow	Static Pressure	Current	Power	Noise
		VAC	HZ	RPM	CFM	Inch-H ₂ O	A	W	dBA
GA1093HBL	2BALL	110/120	50/60	2700/3000	40/45	0.17/0.20	0.15/0.12	10/9	35/37
GA1093HBT	2BALL	110/120	50/60	2700/3000	40/45	0.17/0.20	0.15/0.12	10/9	35/37
GA1093HSL	SLEEVE	110/120	50/60	2700/3000	40/45	0.17/0.20	0.15/0.12	10/9	35/37
GA1093HST	SLEEVE	110/120	50/60	2700/3000	40/45	0.17/0.20	0.15/0.12	10/9	35/37
GA2093HBL	2BALL	220/240	50/60	2700/3000	40/45	0.17/0.20	0.15/0.12	16/13	35/37
GA2093HBT	2BALL	220/240	50/60	2700/3000	40/45	0.17/0.20	0.15/0.12	16/13	35/37
GA2093HSL	SLEEVE	220/240	50/60	2700/3000	40/45	0.17/0.20	0.15/0.12	16/13	35/37
GA2093HST	SLEEVE	220/240	50/60	2700/3000	40/45	0.17/0.20	0.15/0.12	16/13	35/37
GA1093MBL	2BALL	110/120	50/60	2300/2500	33/40	0.14/0.15	0.12/0.10	8.5/7.0	24/25
GA2093MBL	2BALL	220/240	50/60	2300/2500	33/40	0.14/0.15	0.10/0.08	14/11	24/25
GA1093LBL	2BALL	110/120	50/60	2000/2200	27/30	0.10/0.11	0.09/0.07	7.0/6.0	22/24
GA2093LBL	2BALL	220/240	50/60	2000/2200	27/30	0.10/0.11	0.09/0.07	11/9.0	22/24