





General Specifications

Airflow	18~20 CFM
Housing	Die Cast Aluminum Painted Black Or Natural Color
Impeller	Plastic With Fiber Glass Filled UI 94V-0
Motor Type	Shaded Pole, Impedance Protected
Connecting	Terminal & Wire Leads

Dimensions:mm

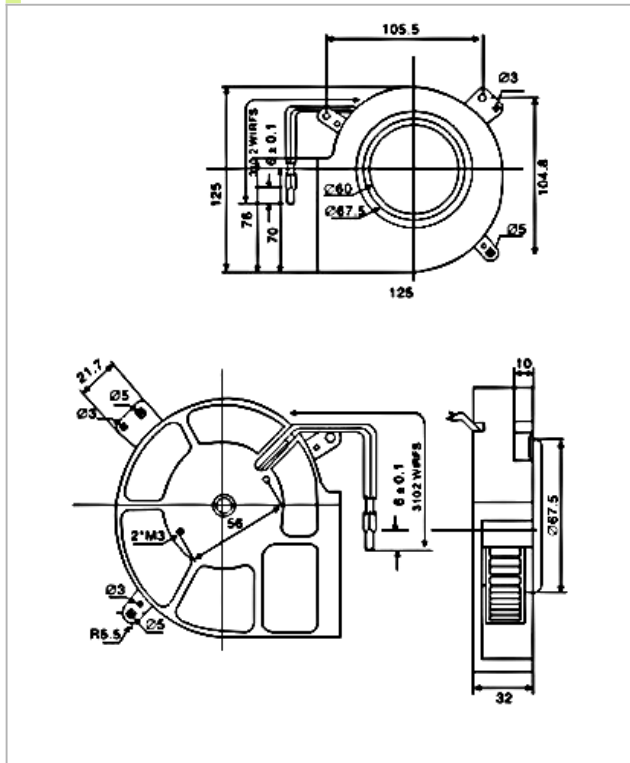

Performace

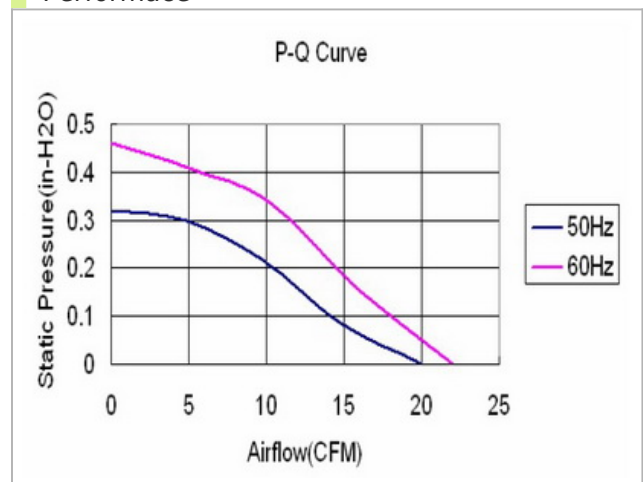

Specifications

Model NO.	Bearing	Rated Voltage	Frequency	Speed	Airflow	Static Pressure	Current	Power	Noise
		VAC	HZ	RPM	CFM	Inch-H2O	A	W	dBA
GB1123HBL	2BALL	110/120	50/60	2600/3000	18/20	0.34/0.50	0.24/0.21	21/19	45/48
GB1123HSL	SLEEVE	110/120	50/60	2600/3000	18/20	0.34/0.50	0.24/0.21	21/19	45/48
GB2123HBL	2BALL	220/240	50/60	2600/3000	18/20	0.34/0.50	0.13/0.11	21/19	45/48
GB2123HSL	SLEEVE	220/240	50/60	2600/3000	18/20	0.34/0.50	0.13/0.11	21/19	45/48