





127X127X38mm

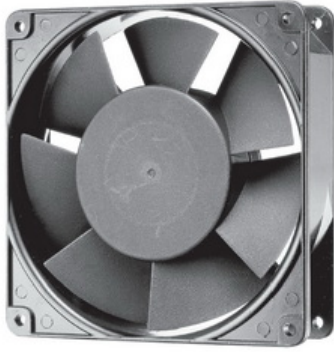

General Specifications

Airflow	72~140 CFM
Housing	Die Cast Aluminum Painted Black Or Natural Color
Impeller	Plastic With Fiber Glass Filled UL 94V-0
Motor Type	Shaded Pole, Impedance Protected
Connecting	Terminal & Wire Leads

Dimensions:mm

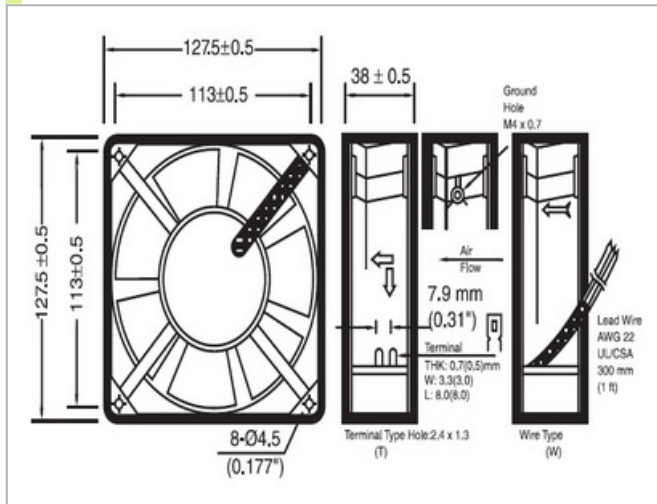

Specifications

Model NO.	Bearing	Rated Voltage VAC	Frequency HZ	Speed RPM	Airflow CFM	Static Pressure Inch-H ₂ O	Current A	Power W	Noise dBA
GA1133HBL	2BALL	110/120	50/60	2700/3000	106/120	0.32/0.20	0.20/0.16	14/12	50
GA1133HSL	SLEEVE	110/120	50/60	2700/3000	106/120	0.32/0.20	0.20/0.16	14/12	50
GA2133HBL	2BALL	220/240	50/60	2700/3000	106/120	0.32/0.20	0.13/0.10	18/14	50
GA2133HSL	SLEEVE	220/240	50/60	2700/3000	106/120	0.32/0.20	0.13/0.10	18/14	50