




25X25X10mm




General Specifications

Airflow	2.0~3.3 CFM
Static Pressure	3.7~6.3 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1571 #28 AWG

Dimensions:mm

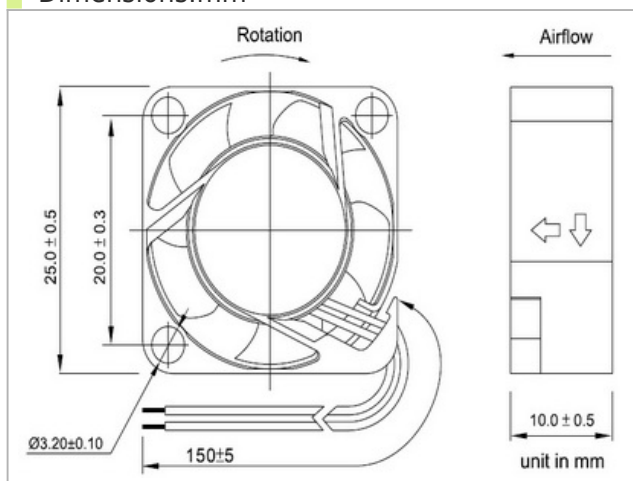

Performance

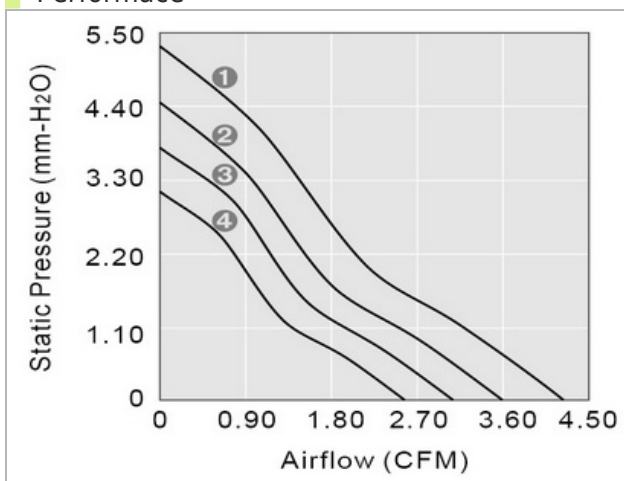

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD052510LB-N	2BALL	05	4~5.5	7000	2.0	3.7	75	0.38	80000	4	18	7.5
GD052510MB-N	2BALL	05	4~5.5	8500	2.4	4.5	110	0.55	80000	3	22.5	7.5
GD052510HB-N	2BALL	05	4~5.5	10000	2.8	5.3	140	0.70	75000	2	26	7.5
GD052510EB-N	2BALL	05	4~5.5	12000	3.3	6.3	180	0.90	65000	1	30	7.5
GD052510LL-N	Sintetico	05	4~5.5	7000	2.0	3.7	80	0.40	50000	4	<17	7.5
GD052510ML-N	Sintetico	05	4~5.5	8500	2.4	4.5	80	0.40	50000	3	19.2	7.5
GD122510LB-N	2BALL	12	9~13.2	7000	2.0	3.7	40	0.48	80000	4	18	7.5
GD122510MB-N	2BALL	12	7~13.2	8500	2.4	4.5	50	0.60	80000	3	22.5	7.5
GD122510HB-N	2BALL	12	7~13.2	10000	2.8	5.3	65	0.78	75000	2	26	7.5
GD122510EB-N	2BALL	12	7~13.2	12000	3.3	6.3	70	0.84	65000	1	30	7.5
GD122510LL-N	Sintetico	12	9~13.2	7000	2.0	3.7	40	0.48	50000	4	<17	7.5
GD122510ML-N	Sintetico	12	9~13.2	8500	2.4	4.5	50	0.60	50000	3	19.2	7.5