


162X150X55mm




General Specifications

Housing	Aluminum
Impeller	Steel
Motor Type	AC Induction Capacitor
Connecting	Wire Leads
Safety	Thermally Protected (Auto Restart)
Type of Protection	IP54

Dimensions:mm

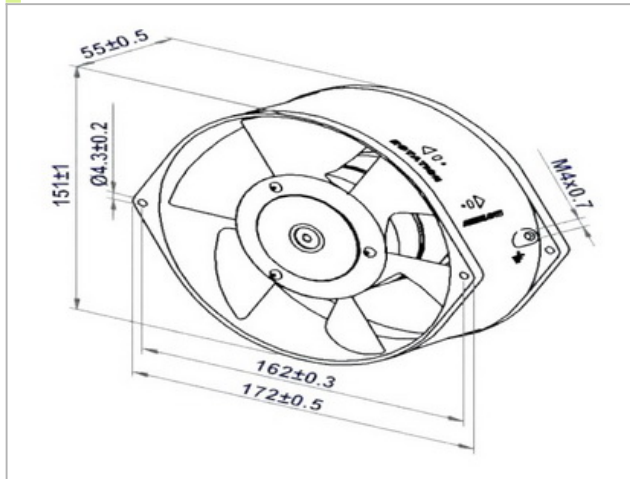

Performance

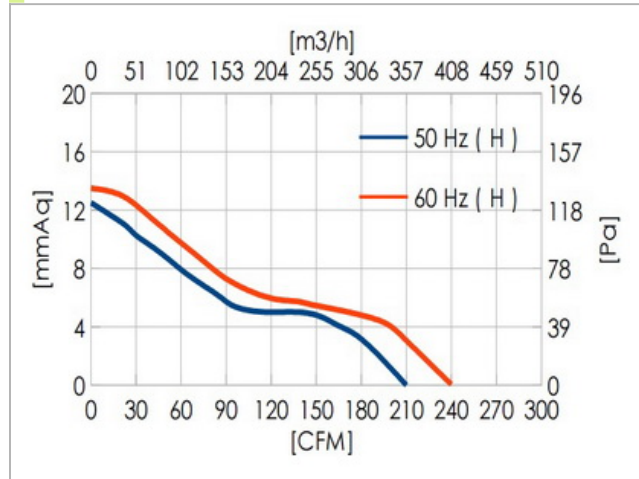

Specifications

Model NO.	Bearing	Rated Voltage VAC	Frequency HZ	Speed RPM	Airflow CFM	Static Pressure mmAq	Current A	Power W	Noise dBA	Weight g
5E-115B-S	2BALL	110/120	50/60	2700/3100	210/240	12.5/13.5	0.25/0.21	27/25	57/61	980
5E-230B-S	2BALL	220/240	50/60	2700/3100	210/240	12.5/13.5	0.11/0.12	26/27	57/61	980
5E-380B-S	2BALL	380	50/60	2600/3000	200/230	12.0/11.0	0.06/0.06	22/23	52/58	840
5E-440B-S	2BALL	440	50/60	2700/3100	210/240	12.5/13.5	0.08/0.07	29/27	57/61	840
5E-480B-S	2BALL	480	50/60	2600/3000	210/240	12.5/13.5	0.07/0.07	33/31	57/61	980