


172X150x51mm




General Specifications

Housing	Aluminum
Impeller	Steel
Motor Type	AC Induction Capacitor
Connecting	Terminal & Wire Leads
Safety	Thermally Protected (Auto Restart)
Type of Protection	IP54

Dimensions:mm

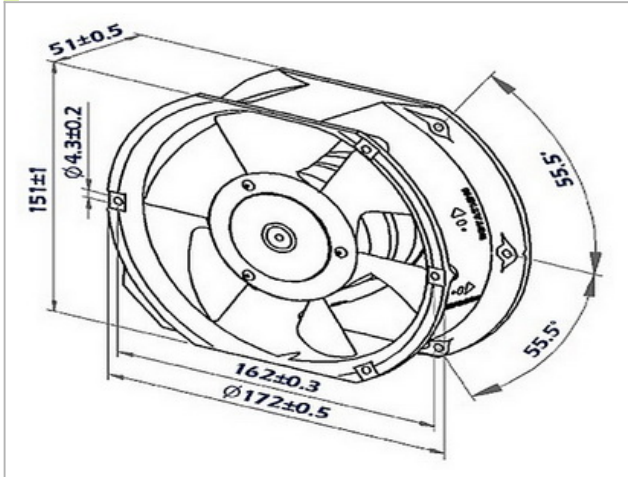

Performace

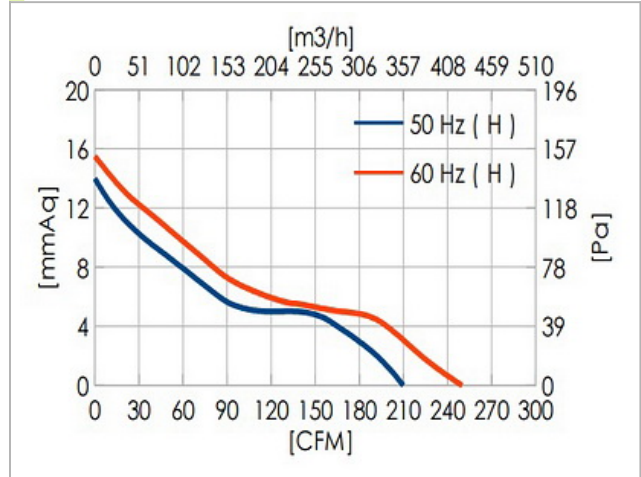

Specifications

Model NO.	Bearing	Rated Voltage	Frequency	Speed	Airflow	Static Pressure	Current	Power	Noise	Weight
		VAC	HZ	RPM	CFM	mmAq	A	W	dBA	g
GA1175HBT-S	2BALL	110/120	50/60	2700/3100	210/250	14.0/15.5	0.25/0.21	27/25	53/59	1080
GA1175HBL-S	2BALL	110/120	50/60	2700/3100	210/250	14.0/15.5	0.25/0.21	27/25	53/59	1080
GA2175HBT-S	2BALL	220/240	50/60	2700/3100	210/250	14.0/15.5	0.11/0.12	26/27	53/59	1080
GA2175HBL-S	2BALL	220/240	50/60	2700/3100	210/250	14.0/15.5	0.11/0.12	26/27	53/59	1080
GA3175HBT-S	2BALL	380	50/60	2600/3000	200/230	12.0/11.0	0.06/0.06	22/23	52/58	1080
GA3175HBL-S	2BALL	380	50/60	2600/3000	200/230	12.0/11.0	0.06/0.06	22/23	52/58	1080
GA4175HBT-S	2BALL	440	50/60	2700/3100	210/240	13.5/14.5	0.08/0.07	29/27	53/59	1080
GA4175HBL-S	2BALL	440	50/60	2700/3100	210/240	13.5/14.5	0.08/0.07	29/27	53/59	1080
GA4175HBT-S	2BALL	480	50/60	2600/3000	210/240	12.0/11.0	0.07/0.07	33/31	53/59	1080
GA4175HBL-S	2BALL	480	50/60	2600/3000	210/240	12.0/11.0	0.07/0.07	33/31	53/59	1080
GA1175XBT-S	2BALL	110/120	50/60	2800/3300	220/260	16.5/20.0	0.27/0.23	26/26	55/61	1080
GA2175XBT-S	2BALL	220/240	50/60	2800/3300	220/260	16.5/20.0	0.10/0.11	23/26	55/61	1080