


176X176X89mm




General Specifications

Housing Die Cast Aluminum Painted Black Or Natural Color
 Impeller Glass Reinforced Thermoplastic, UL 94V-0
 Motor Type Single-Phase Induction Capacitor
 Connecting Terminal & Wire Leads
 Safety Thermally Protected (Auto Restart)

Dimensions:mm

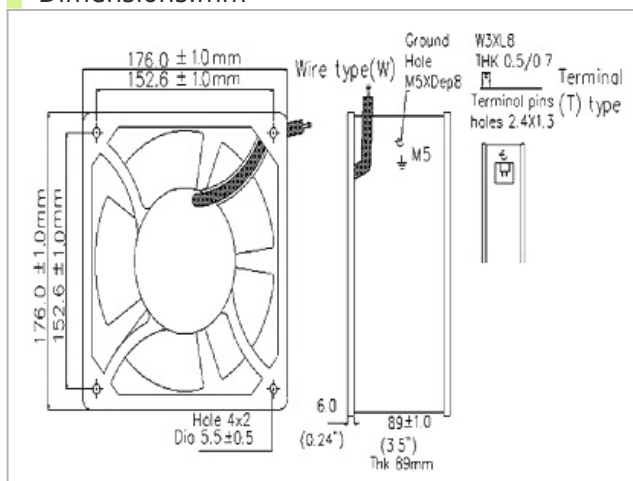

Performance

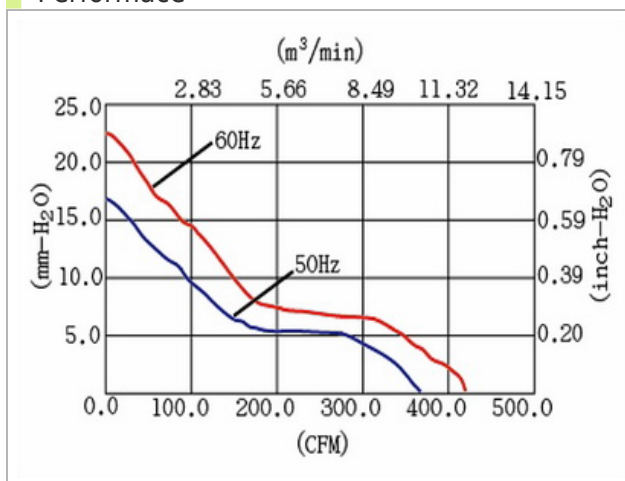

Specifications

Model NO.	Bearing	Rated Voltage VAC	Frequency HZ	Speed RPM	Airflow CFM	Static Pressure Inch-H2O	Current A	Power W	Noise dBA	Weight KG
GF-B180H1-89	2BALL	110/120	50/60	2800/3250	370/420	0.67/0.88	0.57/0.48	50/52	61/64	2
GF-B180H2-89	2BALL	220/240	50/60	2800/3250	370/420	0.67/0.88	0.21/0.23	43/52	61/64	2