


180X180X65mm




General Specifications

Housing Die Cast Aluminum Painted Black Or Natural Color
 Impeller Glass Reinforced Thermoplastic, UL 94V-0
 Motor Type Single-Phase Induction Capacitor
 Connecting Terminal & Wire Leads
 Safety Thermally Protected (Auto Restart)

Dimensions:mm

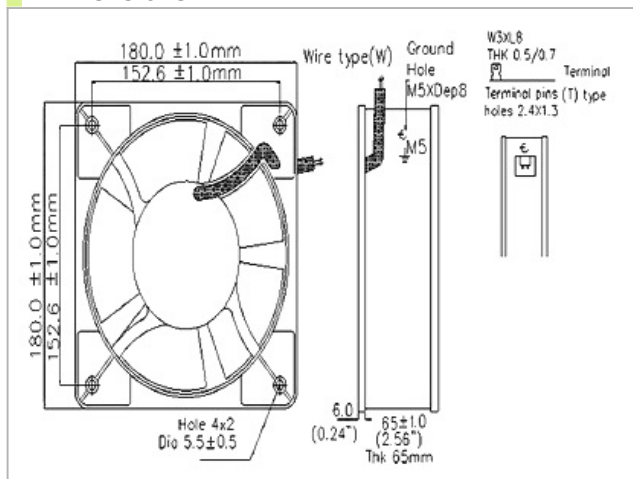

Performance

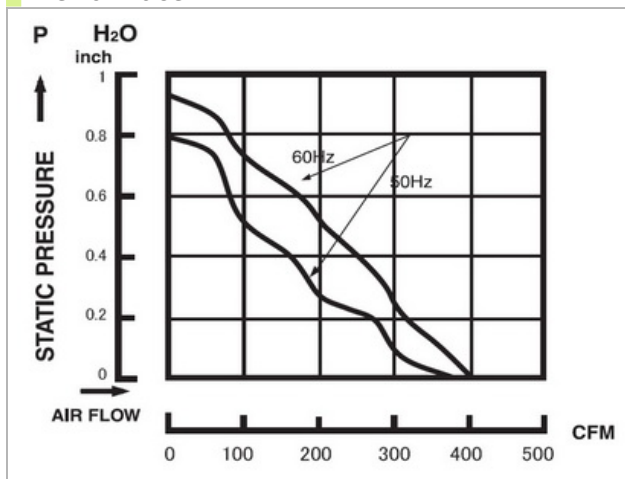

Specifications

Model NO.	Bearing	Rated Voltage VAC	Frequency HZ	Speed RPM	Airflow CFM	Static Pressure Inch-H ₂ O	Current A	Power W	Noise dBA	Weight KG
GF-B180H1	2BALL	110/120	50/60	2800/3250	370/420	0.72/0.93	0.53/0.50	50/52	60/63	1.8
GF-B180H2	2BALL	220/240	50/60	2800/3250	370/420	0.72/0.93	0.23/0.24	43/52	59/63	1.8