


205X205X72mm




General Specifications

Housing Die Cast Aluminum Painted Black Or Natural Color
 Impeller Glass Reinforced Thermoplastic, UL 94V-0
 Motor Type Single-Phase Induction Capacitor
 Connecting Terminal & Wire Leads
 Safety Thermally Protected (Auto Restart)

Dimensions:mm

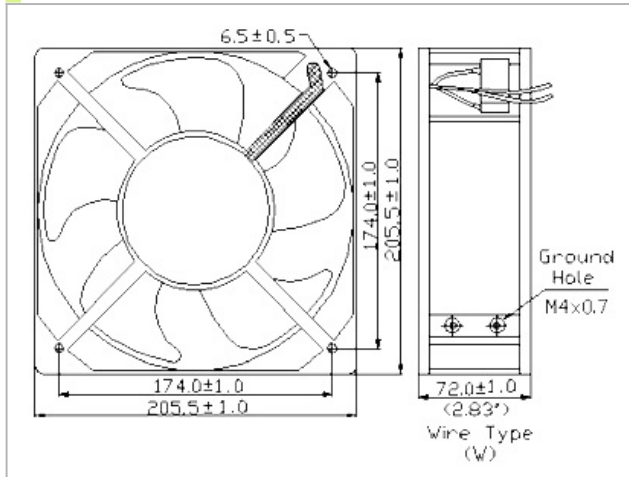

Performance

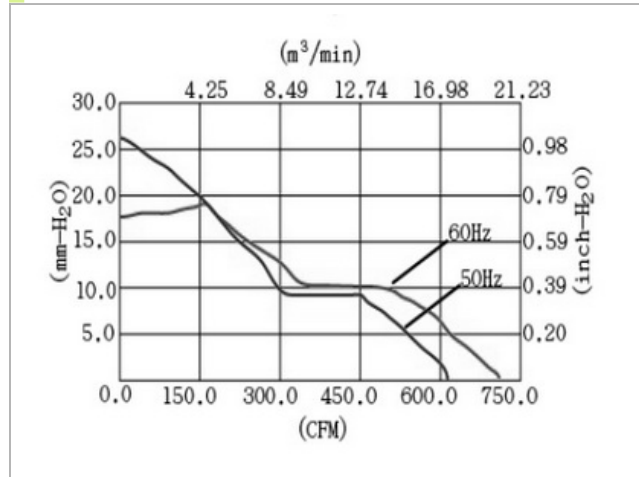

Specifications

Model NO.	Bearing	Rated Voltage VAC	Frequency HZ	Speed RPM	Airflow CFM	Static Pressure Inch-H2O	Current A	Power W	Noise dBA	Weight KG
GF-B205H1	2BALL	110/120	50/60	2850/3250	620/710	1.04/0.69	0.60/1.00	65/102	67/71	2.1
GF-B205H2	2BALL	220/240	50/60	2850/3250	620/710	1.04/0.63	0.30/0.49	65/102	68/71	1.8
GF-B205L2	2BALL	220/240	50/60	1450/1750	350/385	0.38/0.50	0.146/0.149	68/73	30/35	2