


# 250Ø



## General Specifications

|                    |                        |
|--------------------|------------------------|
| Airflow            | 1150 m <sup>3</sup> /H |
| Blade              | Iron                   |
| Frame              | Iron                   |
| Connecting         | Terminal Box           |
| Type of Protection | IP54                   |

## Dimensions:mm

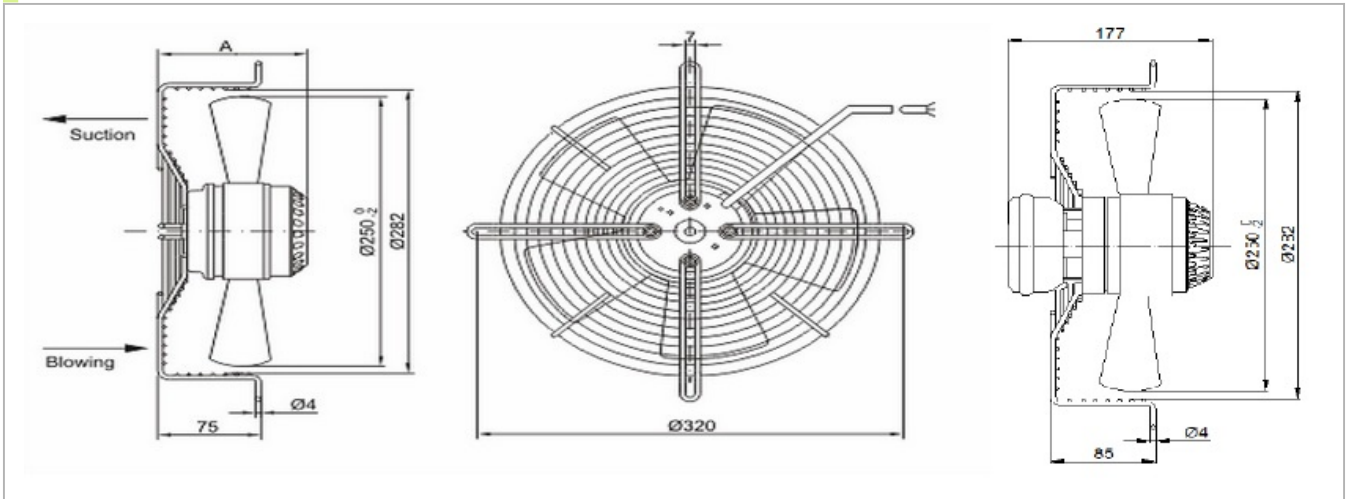

## Specifications

| Model NO. | Rated Voltage<br>VAC | Frequency<br>HZ | Speed<br>RPM | Airflow<br>M <sup>3</sup> /H | Current<br>A | Power<br>W | Capactor<br>uF | Noise<br>dBA | Weight<br>KG | A   |
|-----------|----------------------|-----------------|--------------|------------------------------|--------------|------------|----------------|--------------|--------------|-----|
| 2E250-Z   | 220/240              | 50/60           | 2500         | 1800                         | 0.78         | 180        | 4              | 68           | 3.0          | 112 |
| 2D250-Z   | 3Ø<br>220/380/440    | 50/60           | 2750/3150    | 1650/1950                    | 0.33/0.59    | 160/225    | /              | 70/72        | 3.2          | /   |
| 4E250-Z   | 220/240              | 50/60           | 1380/1530    | 1000/1150                    | 0.22/0.29    | 50/65      | 1.5            | 50           | 2.5          | 104 |
| 4D250-Z   | 3Ø<br>220/380/440    | 50/60           | 1350/1550    | 1000/1150                    | 0.13/0.15    | 60/70      | /              | 50           | 2.7          | 102 |