





General Specifications

Airflow	21~74 CFM
Static Pressure	1.7~2.6 mmAq
Housing	Black Zinc Electroplating
Blade	ALUMINUM ALLOY
Connecting	Wire Leads

Performance


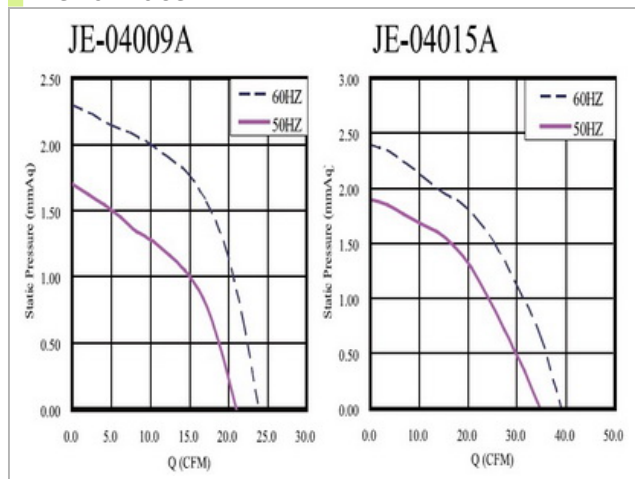


Performance

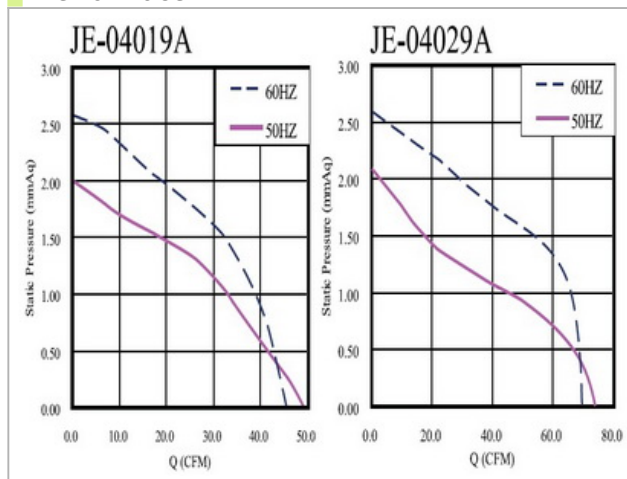

Dimensions:mm

Model	Spec.	Size (mm)		
		A	B	C
JE-04009A12		98	108	160
JE-04009A23				
JE-04015A12		160	170	222
JE-04015A23				
JE-04019A12		198	208	260
JE-04019A23				
JE-04029A12		300	310	366
JE-04029A23				

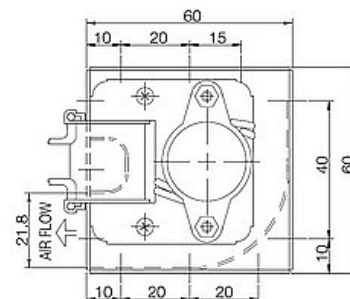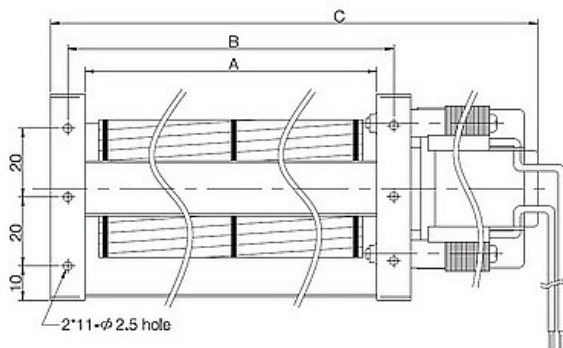

Specifications

Model NO.	Rated Voltage VAC	Frequency HZ	Speed RPM	Airflow CFM	Static Pressure mmAq	Current A	Power W	Noise dBA	Weight g
JE-04009A12	110/120	50/60	2700/3000	21/24	1.7/2.3	0.14/0.12	10/9	29/33	520
JE-04009A23	220/240	50/60	2700/3000	21/24	1.7/2.3	0.09/0.07	11/9	29/33	520
JE-04015A12	110/120	50/60	2600/2800	35/39	1.9/2.4	0.15/0.13	11/10	30/34	560
JE-04015A23	220/240	50/60	2600/2800	35/39	1.9/2.4	0.09/0.07	11/9	30/34	560
JE-04019A12	110/120	50/60	2500/2400	49/46	2.0/2.6	0.15/0.13	10/9	33/31	600
JE-04019A23	220/240	50/60	2500/2400	49/46	2.0/2.6	0.09/0.07	12/11	33/31	600
JE-04029A12	110/120	50/60	2400/2200	74/70	2.1/2.6	0.23/0.21	17/16	37/35	730
JE-04029A23	220/240	50/60	2400/2200	74/70	2.1/2.6	0.10/0.09	13/13	37/35	730