




30X30X07mm




General Specifications

Airflow	1.98~3.82 CFM
Static Pressure	0.09~0.25 Inch-H2O
Blade	Plastic Material UL 94V-0 P.B.T.
Frame	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #28 AWG

Dimensions:mm

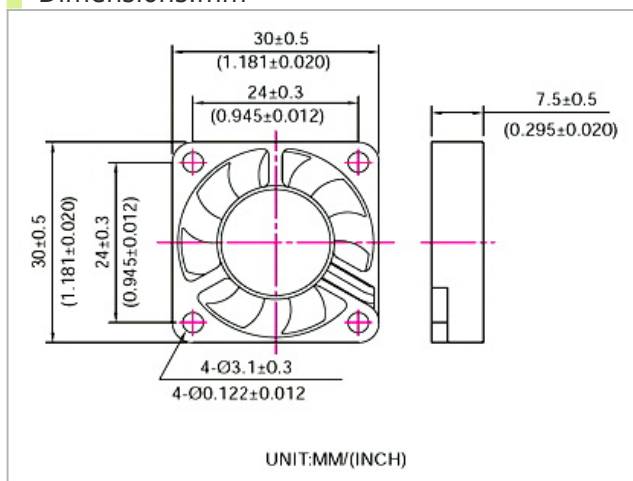

Performace

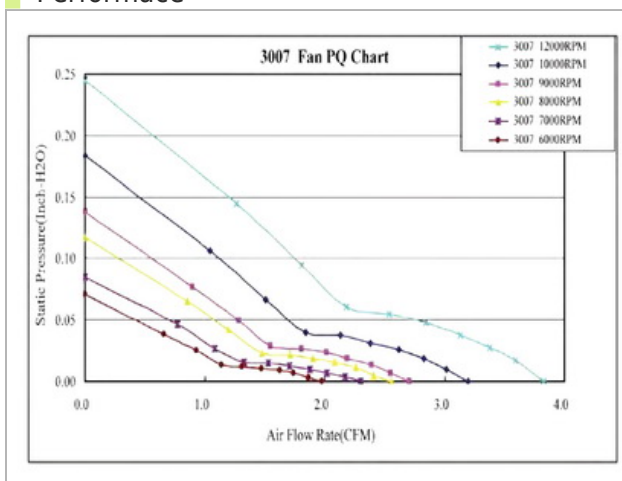

Specifications

Model NO.	Bearing	Rated Voltage VDC	Speed RPM	Airflow CFM	Static Pressure Inch-H2O	Current A	Power W	Noise dBA
GD053007UB-CY	BALL	5	12000	3.82	0.25	0.22	1.1	36.2
GD053007EB-CY	BALL	5	10000	3.2	0.18	0.18	0.9	30
GD053007HB-CY	BALL	5	9000	2.71	0.14	0.16	0.8	26
GD053007MB-CY	BALL	5	8000	2.56	0.12	0.14	0.7	21
GD053007LB-CY	BALL	5	7000	2.3	0.09	0.12	0.6	17
GD053007LB-CY	BALL	5	6000	1.98	0.07	0.1	0.5	13.7
GD123007UB-CY	BALL	12	12000	3.82	0.25	0.14	1.68	36.2
GD123007EB-CY	BALL	12	10000	3.2	0.18	0.11	1.32	30
GD123007HB-CY	BALL	12	9000	2.71	0.14	0.09	1.08	26
GD123007MB-CY	BALL	12	8000	2.56	0.12	0.08	0.96	21
GD123007LB-CY	BALL	12	7000	2.3	0.09	0.06	0.72	17